


Puraflex Tank VOC Membrane Data Sheet

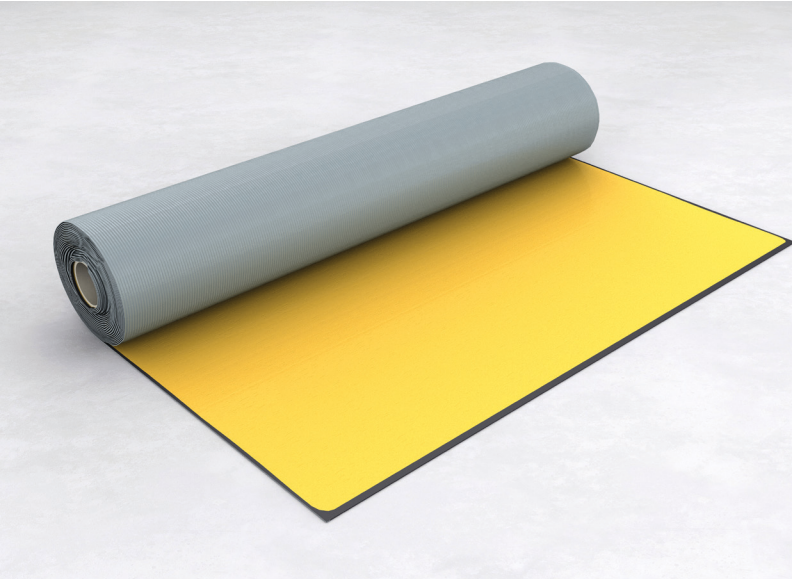

The Cordek Puraflex Tank VOC membrane is a high performance hydrocarbon and chemical resistant barrier with exceptional resistance to a wide range of pollutants including hydrocarbons, industrial chemicals, toxic waste, natural and radioactive gases. The Cordek Puraflex Tank VOC membrane is generally used within foundation construction, predominantly to prevent the transmission of VOCs and ground gases in both horizontal and vertical applications.

Key Features

- High performance membrane comprising of a protective polymeric layer and adhesive bitumen layer, either side of a chemical resistant inner core, for protection of buildings against hydrocarbons, VOCs and ground gases
- Provides additional waterproofing protection to the structure as part of an overall waterproofing system
- Robust membrane construction with excellent resistance to both puncturing and tearing
- Extensively tested with a depth of performance data supported by the Cordek Puraflex Permeation Modeller.

Installation

In order to provide a robust installation, all surfaces should be free from dust, debris, frost or condensation. The substrate that the membrane is being applied to, should have the Cordek Puraflex Tanking Primer applied to it with either a brush or roller – please see Cordek Puraflex Tanking Primer data sheet for more information.

Once the primer is suitably dry, the release paper on the rear side of the membrane should be peeled back to expose the adhesive bitumen layer on the underside of the membrane. This should be applied to the primed substrate, using a hot air welder where possible to aid adhesion. The membrane should be brushed onto the surface so that any trapped air is removed and a suitable bond is achieved.

All laps and junctions within the membrane should be overlapped by a minimum of 150mm. It is recommended that any penetrations within the membrane should be effectively sealed using the appropriate accessories and recommended details – please contact the Cordek technical team for further advice.

For further information on the installation of the Cordek Puraflex Tank VOC membrane please refer to the installation guide, available from Cordek's technical team upon request.

For further information on the full range of VOC & Ground Gas Protection, please contact the Cordek technical team on 01403 799600, techsupport@cordek.com or consult our website at www.cordek.com.



Protection & Repair

All installed areas of the Cordek Puraflex Tank VOC membrane should be inspected for defects, holes, blisters, un-dispersed raw materials, and any sign of contamination by foreign matter prior to covering. The surface of the membrane should be clean at the time of inspection and free from debris.

Following installation of the membrane, the installer and specifier should assess the requirement for additional protection prior to the positioning of reinforcement and pouring of concrete upon it. If it is felt that additional protection is required, then the Cordek Correx protection system should be used directly above the membrane.

If the membrane is damaged, pinholes and small holes can be repaired by patching. The patch should be made of the same barrier membrane and extend at least 150mm outside the damaged area in order to ensure full cover. The patch should be prepared and welded using a hot air gun with a fishtail nozzle. The two surfaces to be welded need to be heated with the hot air gun until melting occurs on both surfaces. Pressure should then be applied to the patch by means of a hand roller until the weld cools.

Storage & Handling

Care should be taken when moving, transporting or handling to avoid damage, puncturing or tearing, which may affect the performance of the membrane.

The membrane should be stored undercover to protect from puncture, dirt, grease, moisture, sunlight and excessive heat. Damaged material should be quarantined and stored separately for repair or replacement. The rolls should be stored on a prepared smooth dry surface (or fully boarded wooden pallets; note that slatted pallets with sharp corners will damage the rolls) and stacked no more than two rolls high. The bottom rolls need to be chocked to prevent them from rolling.

Storage between 5°C to 30°C at 40-65% humidity under non-condensing conditions is recommended.

Product Data

Physical Properties:

Performance	Standard	Units	Values		Reference
			MD	XD	
Physical Properties					
Mass	EN 1849-2	gsm	1069		
Thickness	EN 1849-2	µm	1070		
Tensile Strength at break	ISO R 527-3	N/5mm	370	374	
Elongation at break		%	13	14	
Tear Strength	ISO 34 method B	N	57	60	
Tear Strength	ASTM D1004	N	45	45	
Puncture Resistance	EN ISO 12236	Resistance	N		1470
		Movement	mm		
Burst Strength (Mullen)	ASTM 3786	kPa	145		
Hydrostatic Resistance	ASTM D751-A	kPa	758		
Low Temperature Resistance	EN 495-5		Pass		
Seam Test	ASTM D6392	Peel	NA	167	
Roll Size		25 rolls/pallet	m	1.0 x 15	
Roll Weight		kg	17.0		
Durability Properties					
Temperature Range		°C	-40 to +70		-
Flame Retardant	BS EN ISO 11925-2		Class F		-
UV Resistance		kLy	150		-
Co-efficient of Linear Thermal Expansion (CLTE)	ASTM D696	m/m/ °C	1.26E-04		BICS BS-G428/a
Dimensional Stability	ASTM D1204-08	%			BICS BS-G428/a
Resistance to Oxidation	EN 14575	Max Tensile Str.	-3.2	-3.2	BICS BS-E928-10
Retained strength after ageing		Elongation	-2.2	-1.3	BICS BS-E928-10
Oxidative Induction Time	ASTM D3895	min	58		BICS BS-E928-08
Root Penetration	prCEN/TS 14416	-	Pass		TSUS 90-09-0319
Micro-organisms	EN 12225	-	Pass		TSUS 09/0640
Weathering	EN 12224	-	Not Applicable		Covered installation
Env. Stress Cracking	ASTM D 5397-99	-	Not Applicable		BICS E928-09



Chemical Resistance Properties:

Group	Challenge Chemical 100% concentration	CAS	State	Permeation Rate ^[1] 20 °C at 100 mg/kg mg/m ² /year	Chemical Resistance ^[2] ASTM D5322 / EN 14414 Performance after Chemical Attack				
					Attack on exposed surfaces	Weight %	Thick-ness %	Tensile Strength	
								MD %	XD %
OTHER CHEMICALS									
Carboxylic Carbocyclic Acids	Butyl benzl phthalate (BBP) Di-n-octyl phthalate	85-68-7	Liquid	5.80E-03	NT	NT	NT	NT	NT
	Diethyl phthalate	117-84-0	Liquid	3.11E-03	NT	NT	NT	NT	NT
	Dimethyl phthalate	84-66-2	Liquid	9.28E-01	NT	NT	NT	NT	NT
	Dibutyl phthalate	131-11-3	Liquid	8.30E-01	None	-0.9	-0.2	-20.0	+1.8
	Dioctyl phthalate	84-74-2	Liquid	2.54E-01	None	+0.9	-0.2	-16.9	-22.6
Heterocyclics	Carbazole SVOC	117-81-7	Liquid	1.06E-02	NT	NT	NT	NT	NT
	1,4-Dioxane	86-74-8	Solid	1.58E-01	NA	NA	NA	NA	NA
	Tetrahydrofuran (THF)	123-91-1	Liquid	9.45E+02	NT	NT	NT	NT	NT
Inorganics	Carbon Disulphide	109-99-9	Liquid	2.07E+03	NT	NT	NT	NT	NT
Organics	Carbon Disulphide	75-15-0	Liquid	5.45E-06	NT	NT	NT	NT	NT
	2-Methoxy-2-methylpropane (MTBE)	1634-04-4	Liquid	1.45E+00	None	+1.2	-0.2	+7.7	+17.9
	2-Methylphenol	95-48-7	Solid	8.82E+02	NA	NA	NA	NA	NA
	4-Methylphenol (Cresol)	106-44-5	Solid	8.82E+02	NA	NA	NA	NA	NA
	Pentachlorophenol	87-86-5	Solid	1.70E+00	NA	NA	NA	NA	NA

Glossary

BTEX	Benzene, Toluene, Ethylbenzene and Xylenes
PAH	Polycyclic Aromatic Hydrocarbons
SVOC	Semi Volatile Organic Compound
THM	Trihalomethanes
VOC	Volatile Organic Compound
NA	Not Applicable
NT	Not Tested

[1] Puraflex Permeation Modeller

100mg/kg contaminant at 20°C with No Soil Moisture Partition Coefficient applied.

Permeation Rates are influenced by site-specific variables including contaminant soil concentration, soil temperature, moisture etc. Soil moisture partition coefficients will have a significant effect on the effective concentration levels at the face of any geosynthetic membrane.

Please refer to Puraflex Permeation Modeller software to calculate Permeation Rates for appropriate soil moisture content and other site-specific variables.

[2] Chemical Resistance – ASTM D5322 / EN 14414 Method of Test

Chemical Resistance immersion test method are not applicable for Solids or Gaseous chemicals.

Performance data after Chemical Attack is the variation in Weight & Thickness and Retained Residual Strength & Elongation after immersion in challenge chemical at 50°C for 56 days, measured against control specimen.

Test procedure is equivalent to ASTM D5322 within EPA method 9090 and ASTM D5747.

Though these immersion tests are designed for mono-polymer homogeneous geosynthetic membranes, test results for Puraflex are included for completeness.



Chemical Resistance Properties (Continued):

Group	Challenge Chemical 100% concentration	CAS	State	Permeation Rate ^[1] 20 °C at 100 mg/kg mg/m ² /year	Chemical Resistance ^[2] ASTM D5322 / EN 14414 Performance after Chemical Attack					
					Attack on exposed surfaces	Weight %	Thick-ness %	Tensile Strength		
HYDROCARBONS										
Aliphatics	1,2-Dichloropropane	78-87-5	Liquid	3.54E-01	NT	NT	NT	NT	NT	
	Cyclohexane	110-82-7	Liquid	5.52E-06	None	-2.1	-0.2	-8.2	+4.2	
	Diesel Fuel (DIN 14214)	68334-	Liquid	8.57E-04	None	+3.1	+2.0	-15.9	+7.7	
	Hexane	30-5	Liquid	1.56E-06	None	-1.1	-1.7	-5.6	+6.0	
	Hexachlorobuta-1,3-diene	110-54-3	Liquid	1.51E-01	NT	NT	NT	NT	NT	
	Hexachloroethane	87-68-3	Gaseous	1.18E-05	NA	NA	NA	NA	NA	
	Jet Fuel (Jet A1)	67-72-1	Liquid	1.34E-03	None	+0.5	0	+0.5	+7.1	
	Petrol / Gasoline (unleaded)	91770-15-9	Liquid	2.38E-03	None	-0.2	-1.5	+11.8	+16.7	
	White Mineral Oil	86290-81-5	Liquid	1.34E-03	None	+1.2	0	-4.1	-3.0	
			8042-47-5							
Total Petroleum Hydrocarbons (TPHs)	1,1-Biphenyl		Solid	7.99E-05	NA	NA	NA	NA	NA	
	1,2,4-Trimethylbenzene	VOC	95-63-6	Liquid	3.25E-05	None	+1.7	-0.5	-1.5	+14.9
	1,3,5-Trimethylbenzene	VOC	108-67-8	Liquid	3.25E-05	None	+1.0	-1.0	-6.7	-1.2
	1-Methylnaphthalene		90-12-0	Liquid	1.51E-02	None	+1.6	-0.2	-9.2	-6.5
	2-Chloronaphthalene		91-58-7	Solid	1.22E-02	NA	NA	NA	NA	NA
	2-Methylnaphthalene		91-57-6	Solid	3.35E-03	NA	NA	NA	NA	NA
	2,4-Dimethylphenol		105-67-9	Liquid	1.52E+02	NT	NT	NT	NT	NT
	Acenaphthene	PAH	83-32-9	Solid	1.10E-02	NA	NA	NA	NA	NA
	Anthracene	PAH	120-12-7	Solid	1.54E-03	NA	NA	NA	NA	NA
	Benzene	BTEX	71-43-2	Liquid	3.52E-04	None	-0.3	-1.7	-1.5	-3.6
	Benzo(a)anthracene	PAH	56-55-3	Solid	7.24E-05	NA	NA	NA	NA	NA
	Benzo(a)pyrene	PAH	50-32-8	Solid	7.24E-05	NA	NA	NA	NA	NA
	Benzo(b)fluoroanthene	PAH	205-99-2	Solid	7.24E-05	NA	NA	NA	NA	NA
	Benzo(ghi)perylene	PAH	191-24-2	Solid	7.24E-05	NA	NA	NA	NA	NA
	Benzo(k)fluoroanthene	PAH	207-08-9	Solid	7.24E-05	NA	NA	NA	NA	NA
	n-Butylbenzene	VOC	104-51-8	Liquid	2.51E-05	NT	NT	NT	NT	NT
	sec Butylbenzene	VOC	135-98-8	Liquid	1.26E-03	None	-0.4	+0.2	+8.2	+33.3
	tert Butylbenzene	VOC	98-06-6	Liquid	3.47E-04	None	-0.5	-0.7	+7.2	+22.6
	Chrysene	PAH	218-01-9	Solid	3.57E-04	NA	NA	NA	NA	NA
	Dibenzo(a,h)anthracene	PAH	53-70-3	Solid	7.24E-05	NA	NA	NA	NA	NA
	Ethylbenzene	BTEX	100-41-4	Liquid	1.18E-04	None	-0.7	-0.7	-1.0	+13.1
	Fluoranthene	PAH	206-44-0	Solid	6.67E-04	NA	NA	NA	NA	NA
	Fluorene	PAH	86-73-7	Solid	3.23E-06	NA	NA	NA	NA	NA
	Hexachlorocyclohexane (HCH)		58-89-9	Solid	4.79E-05	NA	NA	NA	NA	NA
	Idendo(1,2,3-cd)pyrene	PAH	193-39-5	Solid	7.24E-05	NA	NA	NA	NA	NA
	Isopropyl benzene (Cumene)	VOC	98-82-8	Liquid	5.64E-05	None	-0.1	-0.2	-3.1	-8.3
	Naphthalene	PAH	91-20-3	Solid	7.76E-01	NA	NA	NA	NA	NA
	Pentachlorobenzene	SVOC	608-93-5	Solid	2.68E-06	NA	NA	NA	NA	NA
	Propylbenzene		103-65-1	Liquid	2.11E-03	None	+1.4	+1.2	+24.6	+31.0
	Pyrene	PAH	129-00-0	Solid	1.40E-07	NA	NA	NA	NA	NA
Styrene	VOC	100-42-5	Liquid	3.98E-02	None	+0.3	-0.5	-0.5	+14.9	
Toluene (Methylbenzene)	BTEX	108-88-3	Liquid	1.14E-03	None	+1.1	-0.5	-7.2	-4.2	
Xylene	BTEX	1330-20-7	Liquid	6.09E-03	None	-0.3	+0.2	+2.6	+3.6	

With aliphatic and aromatic hydrocarbons and halogen derivatives, the surface may show signs of swelling at high concentration.

However the original properties of the protective outer polymer layer are usually restored upon evaporation of the liquid concerned without affecting the integrity of the chemical resistant core.



Chemical Resistance Properties (Continued):

Group	Challenge Chemical 100% concentration	CAS	State	Permeation Rate ^[1] 20 °C at 100 mg/kg mg/m ² /year	Chemical Resistance ^[2] ASTM D5322 / EN 14414 Performance after Chemical Attack					
					Attack on exposed surfaces	Weight %	Thick-ness %	Tensile Strength		
						MD %	XD %			
HYDROCARBONS										
Halogenated Hydrocarbons	1,1-Dichloroethene	VOC	75-35-4	Liquid	1.17E+00	None	+2.6	+1.5	+31.8	+52.4
	1,1,2-Trichloroethane	VOC	79-00-5	Liquid	3.02E+02	None	0.0	+0.7	+17.4	+41.1
	1,1,2,2-Tetrachloroethane	VOC	79-34-5	Liquid	1.01E+01	None	+2.2	+0.5	-11.8	+14.3
	1,2-Dibromoethane	VOC	106-93-4	Liquid	1.04E+03	None	+2.7	-1.0	+13.8	+1.2
	1,2-Dichloroethane	VOC	107-06-2	Liquid	5.30E+00	None	+2.0	-0.5	-19.0	-2.4
	1,2,4-Trichlorobenzene	SVOC	120-82-1	Liquid	6.82E-03	None	+3.1	-0.2	-2.1	+16.1
	1,2,4,5-Tetrachlorobenzene	SVOC	95-94-3	Solid	3.00E-03	NA	NA	NA	NA	NA
	Bromobenzene	VOC	108-86-1	Liquid	3.90E-01	None	+2.4	+0.2	+33.3	+33.3
	Bromodichloromethane	THM	75-27-4	Liquid	1.42E+01	NT	NT	NT	NT	NT
	Bromoform	THM	75-25-2	Liquid	6.35E+01	Swelling	+3.9	+0.5	+17.4	+41.1
	Carbon Tetrachloride	VOC	56-23-5	Liquid	3.19E-05	NT	NT	NT	NT	NT
	Chlorobenzene	VOC	108-90-7	Liquid	3.82E-03	None	-1.2	-1.2	-1.0	+37.5
	Chloroethane	VOC	75-00-3	Gaseous	3.80E-01	NA	NA	NA	NA	NA
	Chlorotoluene		95-49-8	Liquid	7.19E-03	None	+0.3	-0.5	+2.1	+1.2
	Dichlorodiphenyltrichloroethane	DDT	50-29-3	Solid	1.84E-03	NA	NA	NA	NA	NA
	Dichloromethane	VOC	75-09-2	Liquid	1.87E+03	None	+0.8	-1.2	-7.2	-9.5
	Dieldrin		60-57-1	Solid	2.17E-03	NA	NA	NA	NA	NA
	Polychlorinated Biphenyl (PCB)		1336-36-3	Liquid	1.77E-05	NT	NT	NT	NT	NT
	Tetrachloroethene		127-18-4	Liquid	1.95E-04	None	-0.8	-3.7	3.1	+3.6
Trichloroethene	VOC	79-01-06	Liquid	9.25E+00	None	-0.3	-2.0	+9.2	-3.6	
Trichloromethane(Chloroform)	THM	67-66-3	Liquid	2.58E+01	None	+0.7	-0.7	-7.2	-23.8	
Vinyl Chloride	VOC	75-01-4	Gaseous	1.67E-01	NA	NA	NA	NA	NA	
Turpenes	Isopropyltoluene		99-87-6	Liquid	1.55E-03	None	+1.1	+0.7	-15.4	-25.0

Permeation Data:

Group	Challenge Chemical 100% concentration	CAS	State	Permeation Rate	Unit				
PERFORMANCE TESTING PERMEATION DATA									
Liquids	Benzene	ISO 15105-2B	71-43-2	Liquid	3846	mg/m ² /day			
	Ethyl Benzene	ISO 15105-2B	100-41-4	Liquid	494	mg/m ² /day			
	Toluene	ISO 15105-2B	108-88-3	Liquid	3763	mg/m ² /day			
	Xylene	ISO 15105-2B	1330-20-7	Liquid	767	mg/m ² /day			
	Acetone	ISO 15105-2B	67-64-1	Liquid	<0.0001	mg/m ² /day			
Gases	Methane	ISO 15105-1A	74-82-8	Gaseous	0.120	cm ³ /m ² .day.bar	23°C	0% RH	
	Carbon Dioxide	ASTM D1434	124-38-9	Gaseous	1.958	cm ³ /m ² .day.atm	25°C	94.9% RH	
	Oxygen	ASTM D1434	7782-44-7	Gaseous	1.460	cm ³ /m ² .day.atm	25°C	96.2% RH	




Durability Testing:

Durability Testing Chemical Resistance Data						
EN 14414 Chemical Resistance Retained Strength after Chemical Attack - Immersion Test	EN 14414-A (Acids)	Tensile Strength	MPa MD XD	25.2	20.8	Pass
		Elongation	% MD XD	+18.0	+9.5	Pass
	EN 14414-B (Alkalies)	Tensile Strength	MPa MD XD	24.4	22.0	Pass
		Elongation	% MD XD	+17.6	+13.3	Pass
	EN 14414-C (Organic Solvents)	Tensile Strength	MPa MD XD	26.9	23.6	Pass
		Elongation	% MD XD	+24.1	+17.6	Pass
	EN 14414-D (Synthetic Leachate)	Tensile Strength	MPa MD XD	18.2	19.3	Pass
		Elongation	% MD XD	+9.9	-2.6	Pass
EN 14415 Chemical Resistance Retained Strength after Chemical Attack - Immersion Test	EN 14415-A (Hot Water)	Tensile Strength	MPa MD XD	26.1	22.8	Pass
		Elongation	% MD XD	-0.3	-2.5	Pass
	EN 14415-B (Alkalines)	Tensile Strength	MPa MD XD	27.7	25.5	Pass
		Elongation	% MD XD	+3.6	-1.3	Pass
	EN 14415-C (Organic Alcohols)	Tensile Strength	MPa MD XD	24.9	25.2	Pass
		Elongation	% MD XD	-2.6	+2.7	Pass
Resistance to Acids Retained Strength - Immersion Test	EN 14030	Tensile Strength	MPa MD XD	26.5	25.0	Pass
		Elongation	% MD XD	+7.0	+11.2	Pass
Resistance to Alkalis Retained Strength - Immersion Test	EN 14030	Tensile Strength	MPa MD XD	24.3	24.7	Pass
		Elongation	% MD XD	-1.6	+10.2	Pass

Comparative Performance Against HDPE Membranes:

BTEX – Steady State Permeation Rates ISO 15105 – 2B

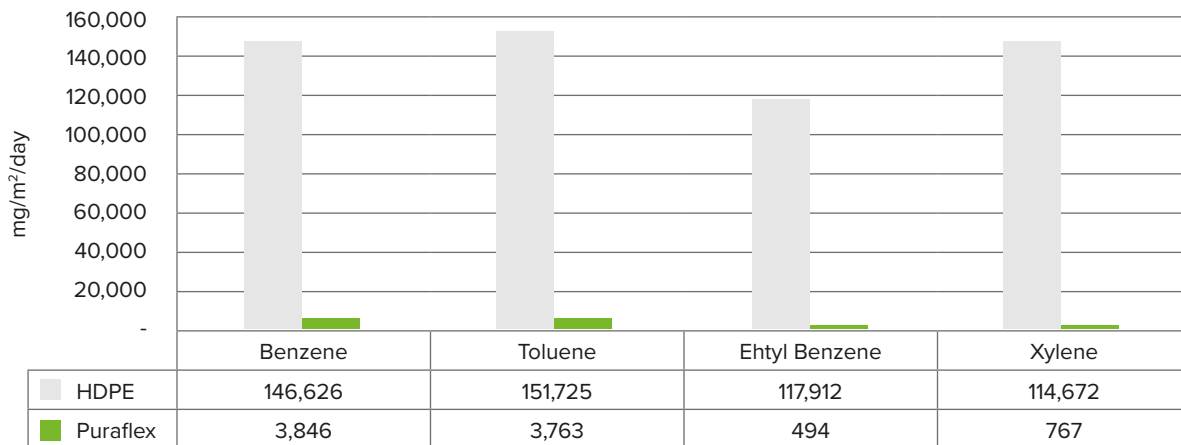

Puraflex significantly outperforms HDPE

Issued: 02/2018

DISCLAIMER: Information contained within this 'Technical Data Sheet' is for guidance only, and it is intended for experienced construction industry workers. It contains summaries of aspects of the subject matter and does not provide comprehensive statements of construction industry practice. As conditions of usage and installation are beyond our control we do not warrant performance obtained. Please contact us if you have any doubt as to the suitability of application. The information provided within this document is based on data and knowledge correct at the time of printing.

Cordek Ltd

Spring Copse Business Park, Slinfold, West Sussex
RH13 0SZ, United Kingdom

Telephone (+44) 1403 799600 Fax (+44) 1403 791718
E-mail info@cordek.com

www.cordek.com

